



SINCE 1974 INNOVATIONS FOR
THE TILE SETTING PROFESSIONAL



TOOLS FOR HIGH-THICKNESS TILES

Selected tools for high-thickness tiles installation

ENG



SELECTED TOOLS FOR HIGH-THICKNESS TILES INSTALLATION

Tiles within 20 and 30 mm (3/4" - 1 3/16") thick can be installed with different laying methods: with adhesive, with mortar, on sand and/or gravel, on raised pedestals, on grass.

The choice of the installation system is dictated by the intended use of the finished floor. Some examples of variables that impact the choice: is it an outdoor or indoor floor? Is the floor intended to be only walkable by pedestrian or does it have to be suitable for vehicles?

Each system requires specific equipment, but all of them face similar handling difficulties arising from the combination of size and weight of the tiles. Over the years, Raimondi has been developing several tools specifically designed to solve those problems.

Both TSX and TSS devices have been designed for handling tiles up to 120x120 cm (47x47" and up to 3 cm thick (1 3/16") safely. TSS is equipped with a manually-operated pump suction cup, while TSX comes with a battery-operated suction cup. Also, TSX can either be used with or without its wheeled cart. ONLY-ONE used in combination with EASY-MOVE 150 allows the operator to handle and install tiles up to 150x150 cm (59"x59") by himself. Thanks to our range of "slab holder" handles, one or more operators can safely handle tiles sized up to 120 cm (47"). The ^{Mkl} cart allows to transport tiles with ease. The RV175 manual-operated pump suction cup is suitable for lifting textured tiles and featuring a maximum nominal load capacity of 130 kg (286 lbs).

However, handling & transport is not the only topic. This catalog shows a selection of Raimondi tools designed to meet other kind of needs frequently faced during the installation of thick and large format tiles.

For instance, Raimondi levelling systems suitable for tiles with a thickness of 20 mm (3/4") or thicker, the + and T spacers specifically designed for thick tiles, the multi-purpose rubber support UP! (to accommodate tiles on it and easily perform cuts, holes, scorings, spread glue and much more), the LEVTOP device to accurately align tiles once they are set on fresh adhesive or mortar bed, the MOLOSSO tile beater which can either be used with mortar or with gravel, the powerful ZOE and SMS bridge wet saws, the IPERBET mixer to perfectly mix large quantities of adhesive or mortar, the dry and wet core bits to easily cut bore round holes, the BERTA sponge-machine ideal for cleaning large surfaces from grouting residues, the MAXITITINA single-rotating brush machine which can either be used for filling joints and for other tasks such as emulsify, surfaces treatment and cleaning.



TOOLS FOR HIGH-THICKNESS TILES

TOOLS FOR INSTALLING AND HANDLING

TSX — device for installing and handling tiles (battery-operated suction cup)	2
TSS — device for installing and handling tiles (manually-operated pump suction cup).....	3
Easy-Move 150 with RV175 suction cups (vacuum with gauge).....	4
Only-One — device to assist installation of tiles.....	5
Tyrrel ^{MkII} — cart for transporting tiles/slabs.....	6
Levtop ^{PLUS} — device for countertops and furniture elements installation	7
RV175 ^{MkIII} — “vacuum” pump suction cup with vacuum gauge.....	8
Slabs lifters.....	9

DIAMOND BITS

Diamond core-drill for dry drilling.....	10
“Humid use” diamond bits	11

SAW MACHINES

SMS — bridge wet saw	12
Zoe — bridge wet saw.....	13
Model and specification SMS and ZOE.....	14

TILE BEATER MACHINE

Molosso — tile beater	15
-----------------------------	----

MIXERS, TROWELS, WORKING SUPPORTS

Iperbet — mixer	16
MX3 — 2 speeds mixing drill	17
UP! The Tiler Pad — multifunctional support	18
Slant ridge notched trowels and trowels with square notch, trowels with round notch	19

LEVELLING SYSTEMS

R.L.S. wedge & clip levelling system.....	20
R.L.S. VITE screw type levelling system	20
Spacers for 20 mm (3/4”) thickness tiles — joint 4 mm (5/32”).....	21
Spacers for cross and “T” installation	21

FLOOR PREPARATION MACHINE

Maxititina — single-rotating brush machine.....	22
Disc holders, felt discs and grouting paddle.....	23

ELECTROSPONGES AND WASH BUCKET

Berta ADV — electrosponge	24
Pedalò — wash bucket	25

TSX – DEVICE FOR INSTALLING AND HANDLING TILES (BATTERY-OPERATED SUCTION CUP)

made in
ITALY



269TSH 01A



269TSH 02A
(INCLUDED IN 269TSH 01A)
TSX set up for 2 operators

PACKAGE



- TSX: device to improve ergonomics and postural comfort when installing and handling tiles.
- Designed for use with tiles of maximum weight 80 Kg (176 lbs) and dimension up to 120 x 120 cm (48" x 48").
- It can be used two ways:
 - with cart: it allows just one man to handle the tile.
 - without cart: must be used by two men. This configuration is needed when greater handling and maneuverability are required during installation.
- TSX allows to pick-up tiles directly from the pallet up to a max height of 50 cm (19.6").
- TSX is equipped with a large (25x25 cm / 10"x10") battery operated suction cup; with a mousse sealing ring for maximum grip.
- Suction cup provides excellent grip on any tiles, structured included. Works on any non-porous material.

- TSX comes with a li-ion rechargeable battery-operated device to generates vacuum.
- Vacuum generator and release valve are close to handle so to be easy to reach while in product in use.
- TSX is equipped with vacuum gauge and a non-return valve.
- Provided with 2 large wheels (Ø 26 cm / 10") suitable for use even on rough surfaces. Made of solid rubber (anti-punctured).
- Two protective tilting plates prevent the suction cup from resting on surfaces that could potentially damage/dirty it when the product is not being used. The protective plates must be excluded when using the product.
- Maximum nominal suction cup load capacity 150 Kg (330 lbs). Safety factor 1.5 applied. Product not recommended for tile heavier than 80 Kg (176 lbs).

MODEL AND SPECIFICATION

Part no.			Description				
269TSH 01A	8050532032644	1	TSX – device for installing and handling tiles with battery-operated suction cup and wheels .	38.5 Wh	22 Kg 48.5 lbs	177x55xh 44 cm 69 1/2"x21 2/3"xh 17 1/3"	26 Kg 57.3 lbs
269TSH 02A	8050532033931	1	TSX – Device for installing and handling tiles with battery-operated suction cup without wheels .	38.5 Wh	15.4 Kg 34 lbs	177x55xh 44 cm 69 1/2"x21 2/3"xh 17 1/3"	22 Kg 48.5 lbs
269TSH 03A	8050532033948	1	Optional wheel kit to convert TSX without wheels (ref. 269TSH 02A) into TSX with wheels (ref. 269TSH 01A)	-	12.4 Kg 27.3 lbs	177x55xh 44 cm 69 1/2"x21 2/3"xh 17 1/3"	19 Kg 41.8 lbs



PROTECTIVE PLATES
PRODUCT BEING USED

PROTECTIVE PLATES
PRODUCT NOT BEING USED

RAIMONDI



269TSA01A




TSS set up for 2 operators



- TSS: device to improve ergonomics and postural comfort when installing and handling tiles.
- Designed for use with tiles of maximum weight 50 Kg (110 lbs).
- It can be used two ways:
 - One man configuration: maximum tile size 60 x 60 cm (24 x 24").
 - Two men configuration: maximum tile size 120 x 120 cm (48 x 48").
- The TSS frame is made of sturdy steel protected with cataphoresis (anti-rust) treatment.
- The TSS is provided with pump suction cup Ø 175 mm (6 7/8"). Triple-lip stain-free rubber. Replaceable rubber cup. Replaceable vacuum gauge.
- The pump-operated suction cup is designed for handling ceramic tiles, smooth or textured. The suction cup is also suitable for any non-porous material such as marble, granite, glass, etc...
- The vacuum gauge allows to constantly monitor suction cup grip status. It indicates if restoring vacuum is needed.
- Suction cup is equipped with stain-free rubber so to not mark tiles.
- Rubber is easy to replace in case of accidental damage. Just remove it from die-cast aluminum suction cup body and replace it.
- The vacuum gauge is protected from shocks. Anyhow, in the event of accidental breakage, it can still be replaced. The product can also be used if the vacuum gauge breaks by using the supplied reset-screw.
- Suction up is equipped with a special anti-rust and high-performance valve.
- Supplied with rubber protective cover and maintenance kit.
- Maximum nominal suction cup load capacity 130 Kg (287 lbs). Safety factor 1.5 applied. Product not recommended for tile heavier than 50 Kg (110 lbs).

MODEL AND SPECIFICATION

Part no.			Description			
269TSA01A	8050532032781	1	TSS – device for installing and handling tiles with RV175 vacuum (pump) suction cup.	5.1 Kg 11.2 lbs	61x21xh 21 cm 24"x8 1/4"xh 8 1/4"	5.6 Kg 12.3 lbs

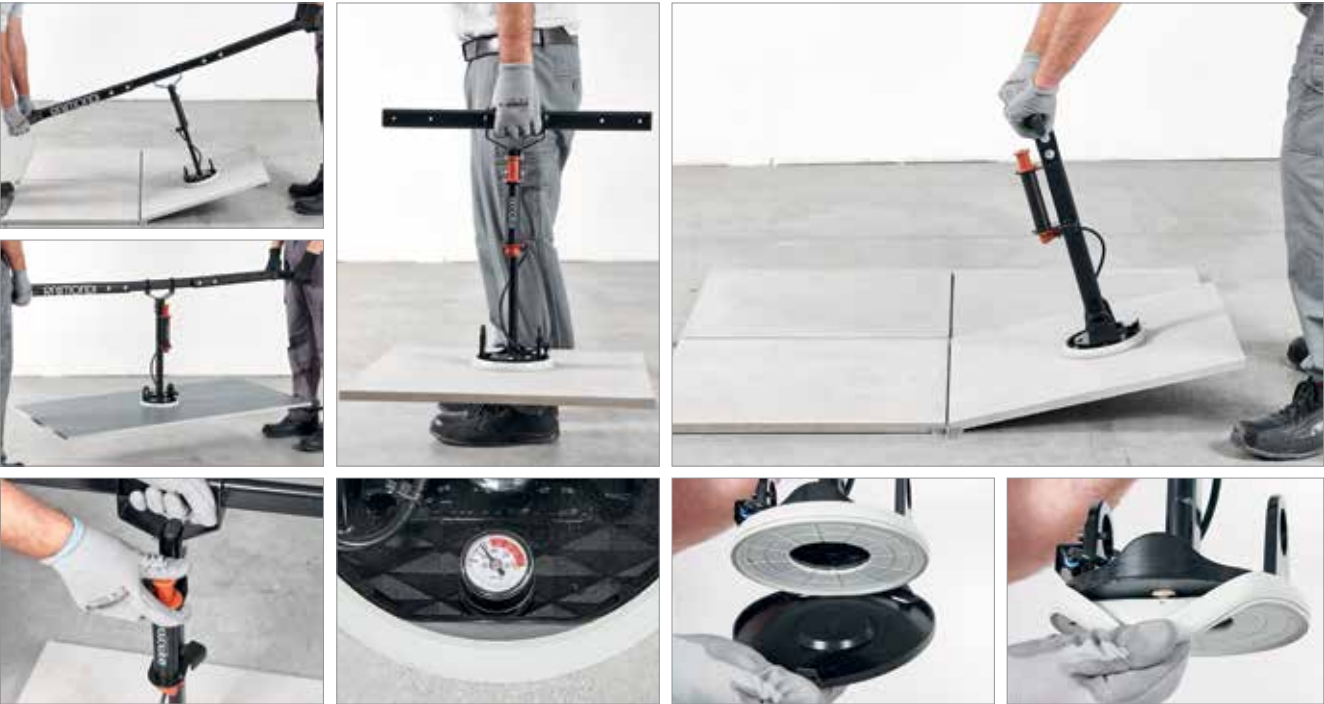

EASY-MOVE 150 WITH RV175 SUCTION CUPS (VACUUM WITH GAUGE)

made in
ITALY

ANTIMACCHIA
NON-STAINING
SUCTION CUP



PACKAGE



CARTON BOX

- Pair of handling devices for tiles/slabs up to 150 cm (4.9') long.
- Fixed length aluminum profiles.
- Equipped with 4 "RV175" vacuum suction cups (2 on each profile), perfect also for textured tiles/slabs.
- "RV175" vacuum suction cups (with die-cast aluminum body) feature vacuum gauge and stainfree rubber, both very easy to replace in case of need, as well as a corrosion-resistant vacuum valve;
- Maximum safety thanks to the vacuum gauges (placed in protected position) which constantly indicate the vacuum level inside the cup. The pump system allows to restore/increase the vacuum level at any time with the suction cup engaged.
- Each vacuum suction cup can be easily repositioned along the entire length of the aluminum bars;

- Tilting suction cups (+/- 5°) to adapt to the eventual bending of the slab and to guarantee the perfect grip in every situation. This feature is particularly useful for textured slabs.
- Suction cups are all positioned in line so to allow using EASY-MOVE 150 also on reduced width slabs (minimum width 19 cm / 7 1/2").
- The 4 sliding handles provided with non-slip and stain-proof grommet result in best ergonomics and handling even for wall installation. Each handle is equipped with soft rubber grip.
- It can be used in combination with EASY-MOVE^{mkiv} crossbars, easy to be assembled and disassembled, thanks to the quick lock-release system and with safety hooks for extra safety.
- Pair of crossbars and suction cup units for crossbars are available as accessories.
- Equipped with plastic suction cups protections, use and maintenance manual.

MODEL AND SPECIFICATION

Part no.			Description			
432EM04V150	8050532016989	1	EASY-MOVE 150 pair of handling devices with fixed length profiles with 4 "RV175" vacuum (pump) suction cups	10.4 Kg 22.9 lbs	180x37x h 30 cm 71"x14"xh 12"	14.2 Kg 31.3 lbs



RAIMONDI



432KR02A



ONLY-ONE mounted on EASY-MOVE^{mkiv} (Art. 432KR02A + Art. 432EM04CA).

- Device to assist installation of tiles.
- It allows a single operator to collect a tile sized up to 150x150 cm (59"x59") from the floor and transport it to the installation area, back butter it, and lay it down next to the tile previously installed.
- On tile bigger than 150x150 cm (59"x59"), it provides excellent support for handling and installation process.
- Suitable for tile thickness from 3 mm up to 20 mm (1/8" – 3/4");


- Suitable with EASY-MOVE handling frames ^{mkiii} and ^{mkiv} versions.

- ONLY-ONE includes:

- Cart with 4 swiveling wheels which can be repositioned according to the tile size.
- Two ergonomic handles (to be fitted to the profiles of EASY-MOVE 150 and/or EASY-MOVE version ^{mkiv} and ^{mkiii}) equipped with a quick coupling system to the cart and anti-slip rubber pads (to safely perform back buttering).

MODEL AND SPECIFICATION

Part no.			Description	Use			
432KR02A	8050532018068	1	ONLY-ONE: dispositivo di ausilio alla posa di piastrelle di grande formato	On Easy-Move ^{mkiii} and Easy-Move ^{mkiv} (X-Light, with double and vacuum suction cups, with/without crossbars)	8.9 Kg 19.6 lbs	117x20x h20 cm 46"x8"xh 8"	11.3 Kg 24.9 lbs

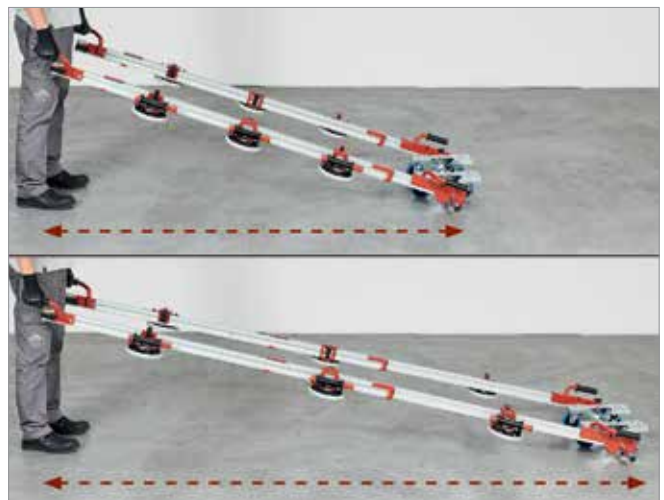

TYRREL^{MkII} – CART FOR TRANSPORTING TILES/SLABS



432ZC4R

PACKAGE



TYRREL^{MkII}

- Compact cart for handling and transporting tiles and slabs.
- Maximum ease of transport with minimum size.
- Capable to travel on uneven surfaces (for instance even on up to 2 cm – 3/4" lippage).
- The support area (length 70 cm – 27 1/2", width 5 cm – 2") is entirely covered in cut-resistant rubber to avoid accidental damage of the tile/slab;
- To grant maximum stability and maneuverability, it is equipped with 4 wheels, 2 of which are swiveling.
- Handles carved into frame for convenient transportation.
- Maximum load capacity: 210 Kg (463 lbs).
- Can be used in combination with handling frames (i.e.: EASY-MOVE).

MODEL AND SPECIFICATION

Part no.			Description			
432ZC4R	8050532026353	1	TYRREL ^{MkII} - Cart for transporting tiles and slabs	6.8 Kg 15 lbs	74x18xh 35 cm 29 1/8"x7"x h 13 3/4"	7.5 Kg 16.5 lbs





185ARLIVAV

LEVTOP
ANTIMACCHIA
NON-STAINING
ACTION 09%

PACKAGE




CARTON BOX

LEVTOP PLUS – DEVICE FOR INSTALLATION OF COUNTERTOPS AND FURNITURE ELEMENTS WITH VARIABLE ANGLE


- To align, level and move sideways kitchen / bathroom countertops (or other furnishing elements) during the installation phase.
- Suitable for both flat and corner installations.
- Equipped with two leveling units
- The vertical leveling is achieved via 4 height adjustable feet with knobs which are meant to be positioned on the 2 countertop sections (slabs): the perfect flatness of the 2 countertop sections (slabs) is achieved thanks to the vertical adjustment of the 4 feet.
- The horizontal alignment of the 2 countertop sections is achieved via a knob which controls with high accuracy the clearance between the 2 suction cups.
- By acting onto knob, the 2 countertop sections (slabs) can be moved to achieve a perfect alignment of the outer edges of the countertop .
- All adjustments can be achieved either on slabs laid horizontally or with an angle (to be equal, larger or smaller than 90 ° - action range 192 °)
- Equipped with 2 vacuum suction cups RV175 (Ø 175 mm - 6 7/8") with stain-free rubber pad, ideal for tiles either with textured or smooth surface finish.
- Suction cups equipped with vacuum gauge.
- Thanks to the vacuum device, the grip can be restored without removing the suction cup from the slab to grant a consistent support during the maturation of the bonding agent.

MODEL AND SPECIFICATION


Part no.			Description			
185ARLIVAV	8050532024229	1	LEVTOP PLUS - Device for installation of countertops and furniture elements with variable angle with RV175 vacuum suction cups with stain-free-rubber	3.5 Kg 7.7 lbs	45x23xh 16 cm 17 2/3"x9"x h 6 1/3"	4 Kg 8.8 lbs



RV175^{MkIII} – “VACUUM” PUMP SUCTION CUP WITH VACUUM GAUGE



Maintenance kit and protection cup.

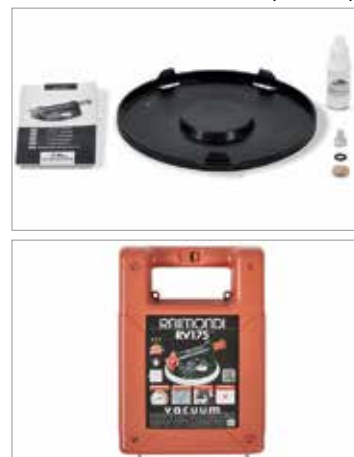

“VACUUM” PUMP SUCTION CUP WITH VACUUM GAUGE

- RV 175^{MkIII} - “vacuum” pump suction cup with vacuum gauge designed for handling ceramic tiles and slabs that guarantees perfect grip even on textured tiles. RV 175 is also suitable for lifting any non-porous material such as marble, granite, glass, etc.
- The vacuum gauge allows to constantly monitoring the gripping status of the suction cup, informing the operator when it is necessary to restore the vacuum level.
- The stain-free rubber cup is easily removable from the die-cast aluminum main body and can therefore be replaced if necessary.

- RV 175^{MkIII} is equipped with a carry case, complete with protection cup and maintenance kit.
- The vacuum gauge is protected against impacts and can be easily replaced, if necessary. In the event of accidental breakage, a dedicated screw is included into the maintenance kit, which allows the suction cup to be used without the vacuum gauge.
- High performance vacuum valve, resistant to corrosion.
- Maximum load capacity: 130 Kg (286.6 lbs). Safety factor 1.5.
- Ø 175 mm (6 7/8”) cup.

MODEL AND SPECIFICATION

Part no.			Description			
185WA02VRV	8050532026933	1	RV175 ^{MkIII} - “Vacuum” pump suction cup with vacuum gauge	1.4 Kg 3.1 lbs	29x20xh 11 cm 11 1/3”x 7 7/8”x h 4 1/3”	1.6 Kg 3.5 lbs

REPLACEMENT PARTS

Part no.			Description			
185WR01A	8050532011434	1	Suction cup rubber + pads	145 gr 5.1 oz	– –	– –





144



144CM50-60



144CM50-120

PACKAGE



CARTON BOX

SLAB LIFTER (MAX EXTENSION 50 cm)

- To lift and lay tiles and large stone, such as terrazzo, etc..
- To facilitate lifting and reduce stress to the hands and fingers.

- For sizes of: 30-35-40-45-50 cm (11 7/8"-13 3/4"- 15 3/4" - 17 3/4" - 19 5/8").

EXTENDING SLAB LIFTERS 50-65 cm

- For handling and laying large format slabs (max 65x65 cm - 25 1/2") with high thickness and structured surfaces.
- Variable extension from 50 to 65 cm (19 5/8" to 25 1/2").

- Sturdy and reliable galvanized steel structure.
- Minimum required joint: 3 mm (1/8").

EXTENDING SLAB LIFTERS 50-120 cm

- For handling and laying large format slabs (max length 120 cm - 47 1/4") with high thickness and structured surfaces.
- Variable extension from 50 to 120 cm (19 5/8" to 47 1/4").

- Sturdy and reliable structure made of aluminum and steel.
- Double handle.
- Minimum required joint: 3 mm (1/8").

Part no.			Description						
144	8024648000347	10	Slab lifter	1.1 Kg	2.4 lbs	40 x 40 x h 15 cm	15 3/4" x 15 3/4" x h 6"	11.4 Kg	25.1 lbs
144CM50-65	8024648084071	2	Extension for slab lifter 50/65 cm	2 Kg	4.4 lbs	71 x 23 x h 12 cm	28" x 9" x h 4 3/4"	4.3 Kg	9.5 lbs
144CM50-120	8024648084750	2	Extension for slab lifter 50/120 cm	4.4 Kg	9.7 lbs	117 x 20 x h 20 cm	46" x 8" x h 8"	10.2 Kg	22.5 lbs



DIAMOND CORE-DRILL FOR DRY DRILLING



181S06



181S08



181S10



181S12



181S14



181S20



181S27



181S35



181S40



181S50



181S60



181S65



181S75

- For cutting holes on porcelain, marble, single and double fired ceramic tiles, granite, marble, ect...
- Dry use only (no need to cool with water via pump).

- Apply them on grinder (9.000 - 11.000 rpm) and perform the hole-cut.
- Long life.
- Available in Ø from 6 up to 75 mm (from 1/4" up to 3 3/8").

TECHNICAL SPECIFICATIONS

Part no.			Description				
181S06*	8024648057174	1	Diamond core-drill for dry drilling	6 mm 1/4"	35 mm 1 3/8"	70 gr 2.5 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S08*	8024648057181	1	Diamond core-drill for dry drilling	8 mm 5/16"	35 mm 1 3/8"	74 gr 2.6 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S10*	8024648057198	1	Diamond core-drill for dry drilling	10 mm 3/8"	35 mm 1 3/8"	74 gr 2.6 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S12*	8024648057204	1	Diamond core-drill for dry drilling	12 mm 1/2"	35 mm 1 3/8"	78 gr 2.8 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S14*	8024648057211	1	Diamond core-drill for dry drilling	14 mm 9/16"	35 mm 1 3/8"	82 gr 2.9 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S20	8024648057228	1	Diamond core-drill for dry drilling	20 mm 3/4"	35 mm 1 3/8"	86 gr 3.0 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S27	8024648057235	1	Diamond core-drill for dry drilling	27 mm 1 1/16"	35 mm 1 3/8"	154 gr 5.4 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S35	8024648057242	1	Diamond core-drill for dry drilling	35 mm 1 3/8"	35 mm 1 3/8"	184 gr 6.5 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S40	8024648057259	1	Diamond core-drill for dry drilling	40 mm 1 9/16"	35 mm 1 3/8"	204 gr 7.2 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S50	8024648057266	1	Diamond core-drill for dry drilling	50 mm 2"	35 mm 1 3/8"	250 gr 8.8 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S60	8024648057273	1	Diamond core-drill for dry drilling	60 mm 2 3/8"	35 mm 1 3/8"	300 gr 10.6 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S65	8024648057280	1	Diamond core-drill for dry drilling	65 mm 2 9/16"	35 mm 1 3/8"	328 gr 11.6 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"
181S75	8024648057297	1	Diamond core-drill for dry drilling	75 mm 3"	35 mm 1 3/8"	384 gr 13.5 lbs	8 x 8 x h 7 cm 3 1/8" x 3 1/8" x h 2 3/4"

TOOLS FOR HIGH-THICKNESS TILES



OK

NO

*CORRECT USE

For obtaining the best output of the diamond core bits of diameter equal and/or less than 14 mm (9/16"), switch off the grinder and water-cool the bit after having made every hole (see picture right - top).

*IMPORTANT

min rpm

11.000



- For cutting holes on porcelain, marble, single and double fired ceramic tiles, granite, marble, ect...
- Suitable also for cutting holes on thin tiles (3-5 mm 1/8"-3/16")
- "Humid use". Drop water on area where hole is to be made.
- Apply them on cordless or standard drill (800-2500 RPM) and perform the hole-cut.
- Long life.
- Maximum tile thickness: 22 mm (7/8")
- Available in Ø from 6 mm (1/4") up to 100 mm (4").
- Shaft attachment Ø 10 mm (3/8").

TECHNICAL SPECIFICATIONS

Part no.			Description					
181US100U	8024648098726	1	"Humid use" diamond bits (for cordless and standard drills)	100 mm	4"	22 mm	7/8"	16 x 12 x h 5 cm
181US090U	8024648098719	1	"Humid use" diamond bits (for cordless and standard drills)	90 mm	3 1/2"	22 mm	7/8"	16 x 12 x h 5 cm
181US075U	8024648098702	1	"Humid use" diamond bits (for cordless and standard drills)	75 mm	3"	22 mm	7/8"	16 x 12 x h 5 cm
181US070U	8024648098696	1	"Humid use" diamond bits (for cordless and standard drills)	70 mm	2 3/4"	22 mm	7/8"	16 x 12 x h 5 cm
181US065U	8024648098689	1	"Humid use" diamond bits (for cordless and standard drills)	65 mm	2 9/16"	22 mm	7/8"	16 x 12 x h 5 cm
181US060U	8024648098672	1	"Humid use" diamond bits (for cordless and standard drills)	60 mm	2 3/8"	22 mm	7/8"	16 x 12 x h 5 cm
181US055U	8024648098665	1	"Humid use" diamond bits (for cordless and standard drills)	55 mm	2 3/16"	22 mm	7/8"	16 x 12 x h 5 cm
181US050U	8024648098658	1	"Humid use" diamond bits (for cordless and standard drills)	50 mm	2"	22 mm	7/8"	16 x 12 x h 5 cm
181US045U	8024648098641	1	"Humid use" diamond bits (for cordless and standard drills)	45 mm	1 3/4"	22 mm	7/8"	16 x 12 x h 5 cm
181US040U	8024648098634	1	"Humid use" diamond bits (for cordless and standard drills)	40 mm	1 5/8"	22 mm	7/8"	16 x 12 x h 5 cm
181US035U	8024648098627	1	"Humid use" diamond bits (for cordless and standard drills)	35 mm	1 3/8"	22 mm	7/8"	16 x 12 x h 5 cm
181US030U	8024648098610	1	"Humid use" diamond bits (for cordless and standard drills)	30 mm	1 3/16"	22 mm	7/8"	16 x 12 x h 5 cm
181US025U	8024648098603	1	"Humid use" diamond bits (for cordless and standard drills)	25 mm	1"	22 mm	7/8"	16 x 12 x h 5 cm
181US020U	8024648098597	1	"Humid use" diamond bits (for cordless and standard drills)	20 mm	3/4"	22 mm	7/8"	16 x 12 x h 5 cm
181US014U	8050532021037	1	"Humid use" diamond bits (for cordless and standard drills)	14 mm	35/64"	22 mm	7/8"	16 x 12 x h 5 cm
181US012U	8024648098580	1	"Humid use" diamond bits (for cordless and standard drills)	12 mm	1/2"	22 mm	7/8"	16 x 12 x h 5 cm
181US010U	8024648098573	1	"Humid use" diamond bits (for cordless and standard drills)	10 mm	3/8"	22 mm	7/8"	16 x 12 x h 5 cm
181US008U	8024648098566	1	"Humid use" diamond bits (for cordless and standard drills)	8 mm	5/16"	22 mm	7/8"	16 x 12 x h 5 cm
181US006U	8024648098559	1	"Humid use" diamond bits (for cordless and standard drills)	6 mm	1/4"	22 mm	7/8"	16 x 12 x h 5 cm



SMS - BRIDGE WET SAW




NEW
HIGH PERFORMANCE DISC
INCLUDED

AVAILABLE BLADES




CONTINUAL CROWN DISC
TURBO DISC
SPECIAL DISC FOR PORCELAIN
SECTOR DISC

ACCESSORIES



LEFT 45°/90° SQUARE
90° SQUARE
FOLDING EXTENSION BENCH
TILE STOPPER DEVICE
COUNTER SQUARE
EXTENSION BENCH WITH ROLLERS
LASER
TELESCOPIC SIDE SQUARE
INCREASED FLANGES Ø 200 mm
WATER CONTAINMENT BAR
CARTON BOX ON PALLET
OVERLAPPABLE PALLET

TECHNICAL CHARACTERISTICS



- For cutting granite, marble, porcelain, single and double fired, bricks, cement etc...
- Various cutting lengths available (see page 14);
- Maximum depth of cut: 100 mm (4") in single pass; 90 mm (3 1/2") for SMS220; 135 mm (5 1/3") in double pass; 125 mm (4 3/4") for SMS220;
- Diamond blade max Ø 360 mm (14"); min Ø 300 mm (12").
- Plunge cut and adjustable cutting depth.
- Heavy duty water pump and jet nozzles provide superior blade cooling.
- Pivoting blade guard remains parallel with tile to ensure maximum cutting depth.
- Cast and extruded aluminum framework.
- Re-adjustable square for long lasting precision.

- Easy-to-remove polypropylene tank for easy cleaning. Capacity: 38 lt (10 Gal).
- Sliding motor assembly with galvanized steel housing provided with 4 pulleys (double internal bearings each).
- Pulleys are easy to re-adjust (tighten): avoid play and confer long lasting precision of cut.
- Tilting movement (0-47°) for 45° angle cut (jolly).
- Telescopic legs provided with double safety device and wheels kit.
- Equipped with: diamond disc Ø 300 mm (12") for porcelain, wheels kit for easy transport, keys kit, user manual.
- Wide range of accessories available.

MODEL SPECIFICATIONS*

Model							
SMS	350 mm	14"	100 mm	4"	60 mm	2 3/8"	∞
	300 mm	12"	60 mm	2 3/8"	45 mm	1 3/4"	

*See page 14 for details and available cutting lengths.




RAIMONDI




NEW
HIGH PERFORMANCE DISC
INCLUDED



AVAILABLE BLADES




ACCESSORIES



PACKAGE



TECHNICAL CHARACTERISTICS



- For cutting granite, marble, porcelain, single and double fired, bricks, cement, etc...
- Various cutting lengths available (see page 14).
- Maximum thickness of cut: 110 mm (4 1/3") in single pass; 235 mm (9 1/4") in double pass.
- Maximum blade diameter Ø 360 mm (14"); smallest blade diameter Ø 300 mm (12").
- Adjustable cutting depth.
- Tilting motor assembly for bevel cuts from 0° to 45°.
- Belt driven system optimizes motor torque and cutting capacity.
- Gear ratio of motor to disc 1,4 ÷ 1. Drive belt type poly V.
- Cast and extruded aluminum framework.
- Easy-to-remove polypropylene tank for easy cleaning. Capacity: 38 lt (10 Gal).

- Heavy duty water pump and (2) jet nozzles provide superior blade cooling.
- Sliding motor assembly with cast aluminum housing provided with 4 re-adjustable pulleys (double bearings). Extruded aluminum rail.
- Re-adjustable square for long lasting precision.
- Telescopic legs provided with safety device to prevent collapsing.
- Pivoting blade guard remains parallel with tile to ensure maximum cutting depth.
- Floating blade guard remains in contact with tile to provide extra safety during operation.
- Equipped with: diamond disc Ø 300 mm (12") for porcelain tiles, wheels kit for easy transport, pressure device to hold tile, key kit, wrench, manual.

MODEL SPECIFICATIONS*

Model							
ZOE 105 ADV	350 mm	14"	110 mm	4 1/3"	80 mm	3 1/8"	∞
	300 mm	12"	80 mm	3 1/8"	20 mm	25/32"	

*See page 14 for details and available cutting lengths.



MODEL AND SPECIFICATION SMS AND ZOE

SMS 100 (cutting length 100 cm): MODEL AND SPECIFICATION

Part no.										
223MS100EUP	8050532006690	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS100V400P	8050532006461	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS100BRP	8050532006829	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	3360
223MS100USP	8050532006836	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	3360	300 mm	12"	3360
223MS100GBP	8050532028609	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	2800	300 mm	12"	2800

SMS 125 (cutting length 125 cm): MODEL AND SPECIFICATION

Part no.										
223MS125EUP	8050532006706	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS125V400P	8050532006478	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS125BRP	8050532006843	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	3360
223MS125USP	8050532006850	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	3360	300 mm	12"	3360
223MS125GBP	8050532028623	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	2800	300 mm	12"	2800

SMS 150 (cutting length 150 cm): MODEL AND SPECIFICATION

Part no.										
223MS150EUP	8050532002760	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS150V400	8050532005471	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS150BRP	8050532002753	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	3360
223MS150USP	8050532002777	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	3360	300 mm	12"	3360
223MS150GBP	80505320	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	2800	300 mm	12"	2800

SMS 220 (cutting length 220 cm): MODEL AND SPECIFICATION

Part no.										
223MS200EU	8024648096289	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS200V400	8050532005518	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2800
223MS200BR	8024648096265	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	3360
223MS200US	8024648096302	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	3360	300 mm	12"	3360
223MS200GB	80246480	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2 CV/1.5 kW	2800	300 mm	12"	2800

ZOE – BRIDGE WET SAW

ZOE 85 ADV (cutting length 85 cm): MODEL AND SPECIFICATION

Part no.										
42085A P	8050532006744	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2000
42085A 400VP	8050532006898	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2000
42085A 60HZP	8050532006904	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	2400
42085A USP	8050532006874	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	3360	300 mm	12"	2400
42085A GBP	8050532006867	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	2800	300 mm	12"	2000

ZOE 105 ADV (cutting length 105 cm): MODEL AND SPECIFICATION

Part no.										
420105A P	8050532006508	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 HP/2.2 kW	2800	300 mm	12"	2000
420105A 400VP	8050532006539	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 HP/2.2 kW	2800	300 mm	12"	2000
420105A 60HZP	8050532006546	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 HP/2.2 kW	3360	300 mm	12"	2400
420105A USP	8050532006515	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2.2 HP/1.65 kW	3360	300 mm	12"	2400
420105A GBP	8050532006492	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2.2 HP/1.65 kW	2800	300 mm	12"	2000

ZOE 130 ADV (cutting length 105 cm): MODEL AND SPECIFICATION

Part no.										
420130A P	8050532006560	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2000
420130A 400VP	8050532006584	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2000
420130A 60HZP	8050532006591	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	2400
420130A USP	8024648056900	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	3360	300 mm	12"	2400
420130A GBP	8050532006553	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	2800	300 mm	12"	2000

ZOE 150 ADV (cutting length 150 cm): MODEL AND SPECIFICATION


Part no.										
420150A AP	8050532002692	1	230 V 50 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	2800	300 mm	12"	2000
420150A 400P	8050532002739	1	400 V 50 Hz	● 3P+T+N / 16A	Trifase	3 CV/2.2 kW	2800	300 mm	12"	2000
420150A 60HP	8050532002746	1	230 V 60 Hz	● 2P+T / 16A	Single-phase	3 CV/2.2 kW	3360	300 mm	12"	2400
420150A USP	8050532002715	1	110 V 60 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	3360	300 mm	12"	2400
420150A GBP	8050532002760	1	110 V 50 Hz	● 2P+T / 32A	Single-phase	2.2 CV/1.65 kW	2800	300 mm	12"	2000





MOLOSSO

TECHNICAL CHARACTERISTICS



- Designed for laying tiles 60x60 cm (23 5/8" x 23 5/8") of 20 mm (3/4") thickness in mud bed, using the vibration method.
- Sturdy structure and 0.9 HP - 0.66 kW motor; net weight: 85 Kg (187 lbs).
- Five vibration intensities.
- Equipped with 36 rollers (9 rows of 4 rollers each) Ø 55 mm (2").

- Telescopic handle.
- The high vibration frequency enables perfect levelling of the tiles and ensures the full bond of the mud to the tile.
- Steel roller holder.

MODEL AND SPECIFICATION

Part no.						
350R9 UE	8024648093820	230 V 50/60 Hz	2P+T / 16A	Single-phase	0.9 CV / 0.66 kW	2800 / 3360
350R9 US	8024648094094	110 V 60 Hz			0.9 CV / 0.66 kW	3360
350R9 GB	8024648096029	110 V 50 Hz			0.9 CV / 0.66 kW	2800

DIMENSIONS AND WEIGHT

Part no.							
MOLOSSO	1	85 Kg	187.4 lbs	90 x 72 x h 63 cm	35 1/2" x 28 1/3" x h 25"	99 Kg	218.26 lbs



IPERBET - MIXER

made in



CE

UK
CA



WARRANTY



ACCESSORIES



MASS
BREAKER TOOL



FLUID MIXTURE
TOOL

TECHNICAL CHARACTERISTICS



ROTATING
BUCKET



45 L



LEGS WITH
WHEELS



REDUCER



DOUBLE
BLADE TOOL

PACKAGE



CARTON BOX

- For mixing tile adhesives, thinsets, mortar for plasters, quartz plasters, concrete and etc...
- Production capacity 300 Kg/h (50 lbs - 100 lbs).
- Mixing at low rpms does not entrap air and provides a homogenous mix.
- Fixed paddle, rotating bucket. This system provides a higher level of operator safety and allows the operator to check the mix quality while mixing.

- Gear ratio of motor to bucket $25 \div 1$.
- Supplied with: two buckets (45 lt/12 gal), standard mixing blade, hex key, user and maintenance manual.

MODEL AND SPECIFICATION

Part no.										
110	8024648003331	1	230 V 50/60 Hz	 2P+T / 16A	Single-phase	0.5 CV/0.37 kW	1400/1680	55 / 66	45 lt	12 gal
110 USA	8024648014092	1	110 V 60 Hz	 2P+T / 15A	Single-phase	0.5 CV/0.37 kW	1680	66	45 lt	12 gal
110 GB	8024648005403	1	110 V 50 Hz	 2P+T / 15A	Single-phase	0.5 CV/0.37 kW	1400	66	45 lt	12 gal

DIMENSIONS AND WEIGHT

Model				
IPERBET	60 x 51 x h 77 cm 23 5/8" x 20" x h 30 1/4"	34 Kg 75 lbs	85 x 60 x h 60 cm 33 1/2" x 23 5/8" x h 23 5/8"	39 Kg 86 lbs




RAIMONDI



301W1600V2VSC



TECHNICAL CHARACTERISTICS



- For mixing mortar, floor screed, plasters, cement, concrete, grout and adhesive for tiles, epoxy resins and so on...
- Two variable speeds: first speed 180-460 rpm; second speed 300- 750 rpm.
- Dual rotation speeds with electronic speed control.
- Double spiral mixing paddle included (Ø 140 mm - 5 1/2") that can be dismantled.
- Ergonomic design (included handles provided with rubber inserts for optimal grip).

- Button for permanent run.
- Externally accessible brushes for greater service ability and longer motor life.
- Mixing paddle with screw clutch M14.
- 2 m (6.5') cable.
- Attractive self-explaining packaging.

CARTON BOX



MODEL AND SPECIFICATION

Part no.										
301W1600V2VSC	8050532024267	1	230 V 50	2P+T / 16A	1600W	180/460-300/750	140 mm - 5 1/2"	•	•	•

DIMENSIONS AND WEIGHT

Model				
MX3 – 1600W	46 x 25 x h 88 cm 18 1/8" x 12 2/3" x h 34 2/3"	5.2 Kg 11.5 lbs	45 x 32 x h 25 cm 17 2/3" x 12 2/3" x h 10"	6.2 Kg 13.7 lbs




UP! THE TILER PAD – MULTIFUNCTIONAL SUPPORT

PATENT
PENDING



394UP01RC

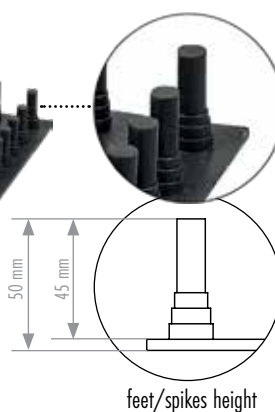

feet/spikes height




8x UP! on display

PACKAGE



CARTON BOX


1x UP! dim. 60x60 cm (24"x24")



2x UP! dim. 60x120 cm (24"x48")



endless UP! = infinite configuration possibilities


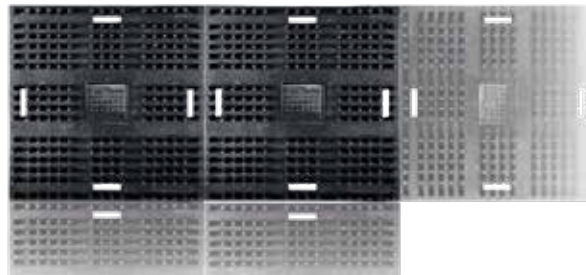


- UP: multifunctional support made of rubber on which to place tiles in order to perform cuts, holes, incisions, spread glue and much more.
- Dimension: 59x59 cm (23 1/4" x 23 1/4"); feet/spikes height 45 mm (1.8")
- 1 unit/piece is suitable to support tiles up to 60 x 60 cm (24 x 24"). Use more units to supports bigger tiles. For instance: 2 units for 60 x 120 cm (24 x 48 ") tile; 3 units for 60 x 180 cm (24 x 71") tile; 4 units of 120 x 120 cm (48 x 48 ") tile.
- Maximum weight load for 1 unit: 75 Kg (165.3 lbs). Weight distributed evenly.
- Made of rubber so to confer maximum resistance to abrasion and weathering.


- Feet/spikes (without losing their ability to support the tile) are characterized by a degree of elasticity such as to optimize their resistance even in the event of contact with a tool (for example a diamond disc).
- The product is easy to clean. Just use jet-water. Furthermore, its elasticity allows to remove even almost set adhesive.
- The practical handles and a non-rigid structure allow for easy stock and transport.
- Up comes into single-unit box packaging provided with product info-graphics. Box can be hung for effective display.

MODEL AND SPECIFICATION

Part no.			Description	PRODUCT DIMENSION				
394UP01RC	8050532033115	1	UP! The Tiler Pad – multifunctional support made of rubber	59x59x h5 cm	23 1/4"x23 1/4"x h 2"	4.2 Kg 9.3 lbs	63x63x h 6.5 cm 25"x25"x h 2 9/16"	4.9 Kg 10.8 lbs



CENTRAL HOLLOW DIMENSION =
20x20 cm (7 7/8"x 7 7/8")



GROOVE WIDTH =
4.5 cm (1 49/64")



RAIMONDI



184HFV10G



184HFV08G



184Q03G



184T15G

PACKAGE



SLANT RIDGE NOTCHED TROWELS 36x13 cm (14 3/16" x 5 1/8")

- The 36x13 cm (14 3/16" x 5 1/8") size increases of 30% the coverage for each pass (compared to 28x12 cm - 11x4 3/4");
- The slanted and rounded notch provide the following advantages:
 1. maximum coverage: when placing the tile on adhesive spread with a slanted ridge, the ridges overlap and collapse to provide superior adhesive coverage and consequently avoid any air pocket under the tile/slab;
 2. No air pocket under the tile/slab means avoid water infiltration in case of outdoor floors or swimming pools.

- The absence of air under the tile improves the transmission of heat in case of underfloor heating;
- The rounded shape of the notch reduces the chance of the adhesive "binding" and ripping away the ridges while troweling. The adhesive does not bind in the rounded corners of this notch so the adhesive ridges stay intact.
- Rubber handle mounted on a die-cast aluminum core.
- Stainless steel, 100% rust-proof.

Part no.	Barcode	Box	Notch type	Notch size		Area		Weight		Dimensions		Volume	
184HFV10G	8050532005006	6		10 mm	13/32"	36 x 13 cm	14 3/16" x 5 1/8"	340 gr	12 oz	38 x 30 x h 12 cm	15" x 12" x h 4 3/4"	3 Kg	6.6 lbs
184HFV08G	8050532004993	6		8 mm	5/16"								

TROWELS WITH SQUARE NOTCH 36x13 cm (14 3/16" x 5 1/8") AND 28x12 cm (11" x 4 3/4")

- The 36x13 cm (14 3/16" x 5 1/8") size increases of 30% the coverage for each pass (compared to 28x12 cm - 11x4 3/4");
- Stamped in 22 gauge tempered steel 7/10.
- Handles are made of polished aluminum electro-welded to the blade with rubber handgrips


- fastened by a non-slip screw.
- Rubber handgrips.
- Handgrip provided with anti-rotation device.
- Also available with "V" notch.

Part no.	Barcode	Box	Notch type	Notch size		Area		Weight		Dimensions		Volume	
184Q03G	8024648003874	6		3 x 3 mm	1/8" x 1/8"	36 x 13 cm	11" x 5 1/8"	340 gr	12 oz	38 x 30 x h 12 cm	15" x 12" x h 4 3/4"	3 Kg	6.6 lbs
184T15G	8024648004208	6		15 mm	9/16"								

ADHESIVE SPREADING WITH STANDARD NOTCHED TROWEL




ADHESIVE SPREADING WITH SLANT RIDGE NOTCHED TROWEL

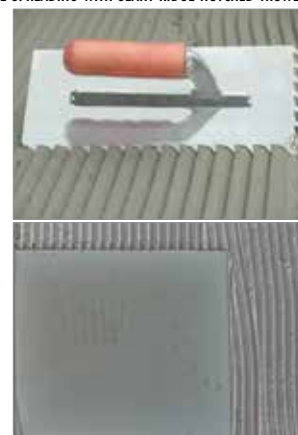

R.L.S. WEDGE/CLIP SYSTEM – CLIPS FOR HIGH-THICKNESS TILES, WEDGES, TRACTION ADJUSTABLE-PLIERS (MANUAL)

made in
italy

ALTO
SPESORE




180BAS15...H20



180BAS30...H20

PATENTED

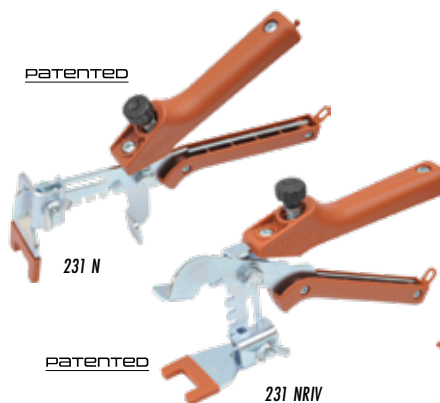

231 N

PATENTED

231 NRIV



180CUNEO

PACKAGE



CARTON BOX

R.L.S. CLIPS 1.5 mm (1/16") AND 3 mm (1/8") FOR HIGH THICKNESS TILES (FROM 12 TO 20 mm – 1/2" TO 3/4")

- Clips for tiles with thickness from 12 to 20 mm (from 1/2" to 3/4");
- Available for joints of 1.5 and 3 mm (1/16" and 1/8").
- High traction capacity and perfect removal.

Part no.			Description	Pieces per bag							
180BAS15A0200H20	8050532028142	10	1.5 mm (1/16") HIGH clips – 200 pcs bag	200	1.5 mm - 1/16"	•	-	-	60x40xh 31 cm	23 3/4"x15 3/4"xh 12 1/4"	7.6 Kg 16.7 lbs
180BAS15A0400H20	8050532028159	5	1.5 mm (1/16") HIGH clips – 400 pcs bag	400	1.5 mm - 1/16"	•	-	-	60x40xh 31 cm	23 3/4"x15 3/4"xh 12 1/4"	7.6 Kg 16.7 lbs
180BAS15A1700H20	8050532028166	1	1.5 mm (1/16") HIGH clips – 1700 pcs bag	1700	1.5 mm - 1/16"	•	-	-	30x40xh 43 cm	12"x15 3/4"xh 17"	7 Kg 15.4 lbs
180BAS30A0200H20	8050532028470	10	3 mm (1/8") HIGH clips – 200 pcs bag	200	3 mm - 1/8"	•	-	-	60x40xh 31 cm	23 3/4"x15 3/4"xh 12 1/4"	7.8 Kg 17.2 lbs
180BAS30A0400H20	8050532028487	5	3 mm (1/8") HIGH clips – 400 pcs bag	400	3 mm - 1/8"	•	-	-	60x40xh 31 cm	23 3/4"x15 3/4"xh 12 1/4"	7.8 Kg 17.2 lbs
180BAS30A1700H20	8050532028494	1	3 mm (1/8") HIGH clips – 1700 pcs bag	1700	3 mm - 1/8"	•	-	-	30x40xh 43 cm	12"x15 3/4"xh 17"	7.2 Kg 15.8 lbs

R.L.S. WEDGE (SUITABLE FOR ALL CLIPS)

- Robust and reusable;
- Dimensions: 92x23xh 17 mm (3 5/8"x29/32"xh 43/64")
- Suitable for all clips of R.L.S. Wedge/Clip system;

Part no.			Description				
180CUNEO100	8024648067944	12	RLS Wedge - 100 pieces bag	60 x 40 x h 31 cm	23 5/8" x 15 3/4" x h 12 1/4"	11.7 Kg	25.8 lbs
180CUNEO250	8024648011947	6	RLS Wedge - 250 pieces bag	60 x 40 x h 31 cm	23 5/8" x 15 3/4" x h 12 1/4"	11.7 Kg	25.8 lbs
180CUNEO500	8024648011954	3	RLS Wedge - 500 pieces bag	60 x 40 x h 31 cm	23 5/8" x 15 3/4" x h 12 1/4"	11.7 Kg	25.8 lbs
180CUNEO1000	8024648069818	1	RLS Wedge - 1000 pieces bag	30 x 40 x h 42 cm	11 1/2" x 16" x h 16 1/2"	8.2 Kg	16.3 lbs
180CU500SE	8024648072603	2	RLS Wedge - 500 pieces plastic bucket	62 x 42 x h 36 cm	25 1/2" x 16 1/2" x h 14"	10.8 Kg	23.8 lbs

R.L.S. TRACTION-ADJUSTABLE-PLIERS (MANUAL)

- Traction-adjustable pliers for tightening the wedge of the RLS Wedge/Clip system;
- Available in floor version and wall version;
- For tiles with thickness from 3 to 20 mm (from 1/8" to 3/4");
- The steel frame guarantees sturdiness and reliability.

Part no.			Description				
231N	8024648072627	4	Adjustable pliers for floor covering	32 x 32 x h 8 cm	12 5/8" x 12 5/8" x h 5/16"	2 Kg	4.4 lbs
231 NRIV	8024648072634	4	Adjustable pliers for floor covering	32 x 32 x h 8 cm	12 5/8" x 12 5/8" x h 5/16"	2 Kg	4.4 lbs

R.L.S. VITE – CLIPS FOR HIGH-THICKNESS TILES AND CAP

made in
italy

VITE

YouTube
raimondispa



180VBH010C

PATENTED



180VGH



PACKAGE



CARTON BOX

R.L.S. VITE CLIPS 1 mm JOINT FOR TILE THICKNESS FROM 14 mm UP TO 26 mm (17/32" - 1/8" - 1 1/32")

Part no.			Description	Pieces per bag	Type			
180VBH010C0100	8050532002944	25	R.L.S. Vite clip for tile thickness; joint 1 mm (1/32") - 100 pcs bags	100	– 1 mm 1/32"	60x40x h31 cm	23 5/8" x 15 3/4" x h 12 1/4"	6.6 Kg 14.5 lbs
180VBH010C0300	8050532002951	10	R.L.S. Vite clip for tile thickness; joint 1 mm (1/32") - 300 pcs bags	300	– 1 mm 1/32"	60x40x h31 cm	23 5/8" x 15 3/4" x h 12 1/4"	7.5 Kg 16.5 lbs
180VBH010C2500	8050532002968	1	R.L.S. Vite clip for tile thickness; joint 1 mm (1/32") - 2500 pcs box	2500	– 1 mm 1/32"	30x40x h42 cm	11 1/2" x 16" x h 16 1/2"	6.3 Kg 13.9 lbs

R.L.S. VITE CAP


Part no.			Description	Pieces per bag			
180VGH0100	8050532003026	12	R.L.S. Vite cap - 100 pcs bags	100	60x40 x h 31 cm	23 5/8" x 15 3/4" x h 12 1/4"	9.7 Kg 21.4 lbs
180VGH0300	8050532003033	4	R.L.S. Vite cap - 300 pcs bags	300	60x40 x h 31 cm	23 5/8" x 15 3/4" x h 12 1/4"	9.6 Kg 21.2 lbs
180VGH0900	8050532004276	1	R.L.S. Vite cap - 900 pcs box	900	30x40 x h 42 cm	11 1/2" x 16" x h 16 1/2"	7.5 Kg 16.5 lbs

RAIMONDI

SPACERS FOR 20 mm (3/4") THICKNESS TILES – JOINT 4 mm (5/32")



made in
ITALY






313+200		313+500	
S	A	B	H
4mm 5/32"	64mm 2 1/2"	64mm 2 1/2"	12mm 15/32"

313T200		313T500	
S	A	B	H
4mm 5/32"	64mm 2 1/2"	34mm 1 11/32"	12mm 15/32"

- Spacers for tiles/slabs with a thickness equal or higher than 20 mm (3/4").
- Available both "+" and "T" types.
- Perfect for outdoor floors laid both with adhesive or onto sand.
- Made of plastic material which is tested for being resistant even when subjected to bad weather conditions and thermal stress.

- Equipped with special wings, designed for preventing the rising of the spacer during the vibrator method.
- The special wings are also provided with specific openings with draining function.
- Spacer's height: 12 mm (1/2").

Part no.		Type	Pieces										
313+200	8024648095268	+	200	—	•	—	•	—	•	•	•	8	
313+500	8024648095275	+	500	—	•	—	•	—	•	•	•	3	59 x 30 x h 40 cm
313T200	8024648095282	T	200	—	•	—	•	—	•	•	•	12	23 5/8" x 11 7/8" x h 15 5/4"
313T500	8024648095299	T	500	—	•	—	•	—	•	•	•	5	
													9.7 Kg 21.4 lbs
													9.2 Kg 20.3 lbs
													11 Kg 24.3 lbs
													11.4 Kg 25.1 lbs



SPACERS FOR CROSS AND "T" INSTALLATION

A line of spacers for the professional which can choose versions with different heights, with holes for the passage of the adhesive, with fins for easy removal etc. Of course, both for cross and "T" installation.

made in
ITALY



MAXITITINA - SINGLE-ROTATING BRUSH MACHINE

made in
ITALY

CE
UK
CA

1
YEAR
WARRANTY


YouTube
channel
raimondispa



ACCESSORIES



TECHNICAL CHARACTERISTICS



PACKAGE



- Single rotating brush for grouting of floors with joints, for smoothing of mortar base,
- Dual rotation speeds 55/110 revolutions/min (66/132 for 60 Hz versions).
- For polishing and sanding surfaces, for cleaning and treatment of Terracotta.
- Accommodates attachments with diameters from 45 cm (17 3/4") to 60 cm (23 5/8").

- Telescopic handle with adjustable tilt.
- Supplied with: hex key kit, user and maintenance manual.
- Quick Change tools.

MODEL AND SPECIFICATION

Part no.								
219	8024648004697	1	230 V 50 Hz	2P+T / 16A	Single-phase	1.2 CV / 0.9 kW	1400 / 2800	55 / 110
219 60HZ	8024648009760	1	230 V 60 Hz	2P+T / 16A	Single-phase	1.2 CV / 0.9 kW	1680 / 3360	66 / 132
219GB110	8024648004727	1	110 V 50 Hz	2P+T / 16A	Single-phase	1.2 CV / 0.9 kW	1400 / 2800	55 / 110
219US115	8024648004734	1	110 V 60 Hz	2P+T / 15A	Single-phase	1.2 CV / 0.9 kW	1680 / 3360	66 / 132

DIMENSIONS AND WEIGHT

Model							
MAXITITINA	50 x 60 x h 80 cm	20" x 23" x h 31"	26 Kg	57 lbs	75 x 50 x h 43 cm	29 1/2" x 20" x h 17"	29 Kg 64 lbs



RAIMONDI



213VELCRO



213PELO



248N

248V

248B



212



DISC HOLDERS AND FELT DISCS

Part no.			Description			
213VELCRO	8024648002730	1	Disc holder for felt and sponge discs with Velcro	2 5 Kg	5.5 lbs	47 x 47 x h 10 cm
213PELO	8024648007193	1	Disc holder for felt and sponge discs with points	2 4 Kg	5.3 lbs	18" x 18" x h 4"
248N	8024648002778	5	Black felt disc (high abrasiveness)	340 gr	12 oz	47 x 47 x h 10 cm
248V	8024648002785	5	Green felt disc (medium abrasiveness)	260 gr	9.2 oz	18" x 18" x h 4"
248B	8024648002792	5	White felt disc (low abrasiveness)	140 gr	5 oz	18" x 18" x h 4"

Part no.	Applications	
213VELCRO 213PELO	Disc holder for felt and sponge discs	430 mm 17"

Part no.	Applications	
248N 248V 248B	Black felt for intensive cleaning Green felt for medium trouble cleaning White felt to wax and polish	456 mm 18"

GROUTING PADDLE

Part no.			Description			
212	8024648002914	1	Grouting paddle with non-abrasive rubber	5 6 Kg	12.4 lbs	50x50xh 10 cm 20"x20"xh 4"



BERTA ADV – ELECTROSPONGE

made in
ITALY

CE
UK
CA

1
YEAR
WARRANTY

YouTube
channel
raimondispa



AVAILABLE SPONGE



SWEEPEX
SPONGE
ROLLER



CELLULOSE
SPONGE
ROLLER



HAVANA
SPONGE
ROLLER

TECHNICAL CHARACTERISTICS



TELESCOPIC
HANDLE



HAVANA
SPONGE
ROLLER



ADJUSTABLE
SQUEEZING



WATER
DRAGGING
WITHOUT PUMP



BUMPER
FOR SPONGE
PROTECTION



FOLDING
HANDLE



ANTI FOAMING
LIQUID



BUCKET
CAPACITY



REDUCER



CHAIN
TRANSMISSION



SPONGE ROLLER
QUICK CLUTCH
SYSTEM

ACCESSORIES



SWEEPEX
SPONGE
ROLLER



CELLULOSE
SPONGE
ROLLER

PACKAGE



CARTON BOX

- Sponge-machine for cleaning grout (cement based or epoxy resin) from floors: terracotta, porcelain, double-fired and single-fired tiles, marble, porphyry, natural stone, quarry tile, treaded tile, etc. during the grouting phase.
- Does not pull grout from the joints.
- Performance: 100 sq m/h for medium difficulty surfaces (800 - 1500 s.f. per hour in general).
- Sponge rollers can last from 150 to 2000 sq m (1600 - 21000 s.f.).
- Water is fed to the roller via a foam-reducing rubber belt. So, no pump is needed resulting in no clog up.
- Moisture level of the sponge roller is adjustable via the easy-to-use pressure adjustment lever.
- Separate lever adjusts the front wheels height.

- Easy-to-replace sponge roller thanks to the magnetic "quick clutch" system.
- The handle folds down for transport and storage. Also thanks to its ergonomic design, handle is fully adjustable for height and angle according to the user(s) needs.
- Die cast aluminium body reduces weight while increasing overall strength and durability.
- Easy-to-remove water-tank (15 liters/4 gal) made of impact resistant plastic to prevent breakage.
- Supplied with: sponge roller for cement based grout, anti-foaming liquid, user and maintenance.
- Sponge roller for epoxy-based grouts available as accessory.

MODEL AND SPECIFICATION

Part no.									
399 ADV	8024648004529	1	230 V 50/60 Hz	2P+T / 16A	Single-phase	0.16 CV / 0.12 kW	2800/3360	"Havana" sponge	21 / 25
399 ADV GB	8024648009685	1	110 V 50 Hz	2P+T / 15A	Single-phase	0.16 CV / 0.12 kW	2800		21
399 ADV USA	8024648009692	1	110 V 60 Hz	2P+T / 15A	Single-phase	0.16 CV / 0.12 kW	3360		25

DIMENSIONS AND WEIGHT

Model								
BERTA ADV	65 x 55 x h 50 cm	25 3/8" x 21 5/8" x h 20"	29 Kg	64 lbs	73 x 60 x h 55 cm	29" x 23 5/8" x h 21 5/8"	32 Kg	70.5 lbs



RAIMONDI



EQUIPPED WITH



SPONGE
SWEEPEX

SPONGE
SWEEPEX

PACKAGE



CARTON BOX

- For cleaning grout from floors and walls.
- The pole sponge enables you to work in an upright position on both floors and walls.
- The pedal eases and speeds the squeezing action of the sponge while allowing the user to remain upright.
- The sponge float with handle can be used on smaller floor and wall areas.

- The high-capacity tank (40 lt - 10.5 gal) reduces the need for frequent water changing.
- The high absorption sponge "Sweepex" allows for a perfect cleaning.
- Supplied with: pole sponge "Sweepex" with aluminum handle, "Sweepex" sponge float with handle, grating, wheels Ø 100 mm (4").

MODEL AND SPECIFICATION

Part no.							SPONGE
356 NSWEE	8024648007414	1			13 x 42 x h 3 cm 5 1/8" x 16 1/2" x h 1 3/16"	17 x 34 x h 4 cm 6 5/8" x 13 3/8" x h 1 5/8"	Sweepex
356 NSWET	8024648007407	1	40 lt	10.6 gal			Sweepex with cuts

DIMENSIONS AND WEIGHT

Model								
PEDALÒ	69 x 54 x h 38 cm	27" x 21 1/4" x h 15"	10.8 Kg	23.8 lbs	70 x 55 x h 40 cm	27 1/2" x 21 5/8" x h 15 3/4"	12.8 Kg	28.2 lbs

SPONGE FLOATS AND REPLACEMENT SPONGES

Part no.			
355FSMOH	8024648001191	5	"Havana" sponge float without handle
355FSSWOH	8024648005427	5	"Sweepex" sponge float without handle
355FSSWOHT	8024648009807	5	"Sweepex" sponge float with cuts without handle
355RIC	8024648001061	20	"Havana" replacement sponge
355RICSWE	8024648007384	20	"Sweepex" replacement sponge
355RICSWET	8024648007391	20	"Sweepex" replacement sponge with cuts
355RICCEL	8024648014108	20	"Cellulose" replacement sponge for Epoxy

Part no.			
336	8024648001221	10	"Havana" sponge float
336SWE	8024648007353	10	"Sweepex" sponge float
336SWET	8024648007438	10	"Sweepex" sponge float with cuts
336RIC	8024648001047	15	"Havana" replacement sponge
336RICSWE	8024648005335	15	"Sweepex" replacement sponge
336RICSWET	8024648005342	15	"Sweepex" replacement sponge with cuts
336RICCEL	8024648014122	15	"Cellulose" replacement sponge for Epoxy



NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There is no text or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins or other markings on the paper.



Images in this catalog may not be reproduced
without the prior written consent of Raimondi
S.p.A.

Due to the continual improvement of our
line of tools, products and specifications are
subject to change without prior notice.

Therefore, no rights can be claimed on the
basis of the data, illustrations and explanations
reported in this catalog.



09/2024

RAIMONDI

Headquarter: Via R. Dalla Costa, 300/A
Registered Office: Via Dei Tipografi, 11
41122 Modena, Italy
info@raimondispa.com
raimondispa.com



TECHNICAL PARTNER